

MEM MDM SERIES - PROFESSIONAL INTEGRATED AMPLIFIERS

AP 304

APPLICATION DATA - 4 CHANNEL SYSTEM MIXED INTEGRATED AMPLIFIERS

TOTAL POWER = 275 WATT

ONLY 2U OF VERTICAL RACK SPACE

19"


AMPLIFIERS COMPLEMENT

1 - MOD MD35M (35W) = 35 WATT

2 - MOD MD60M (60W) = 120 WATT

1 - MOD MD120M (120W) = 120 WATT


2U
3.50"

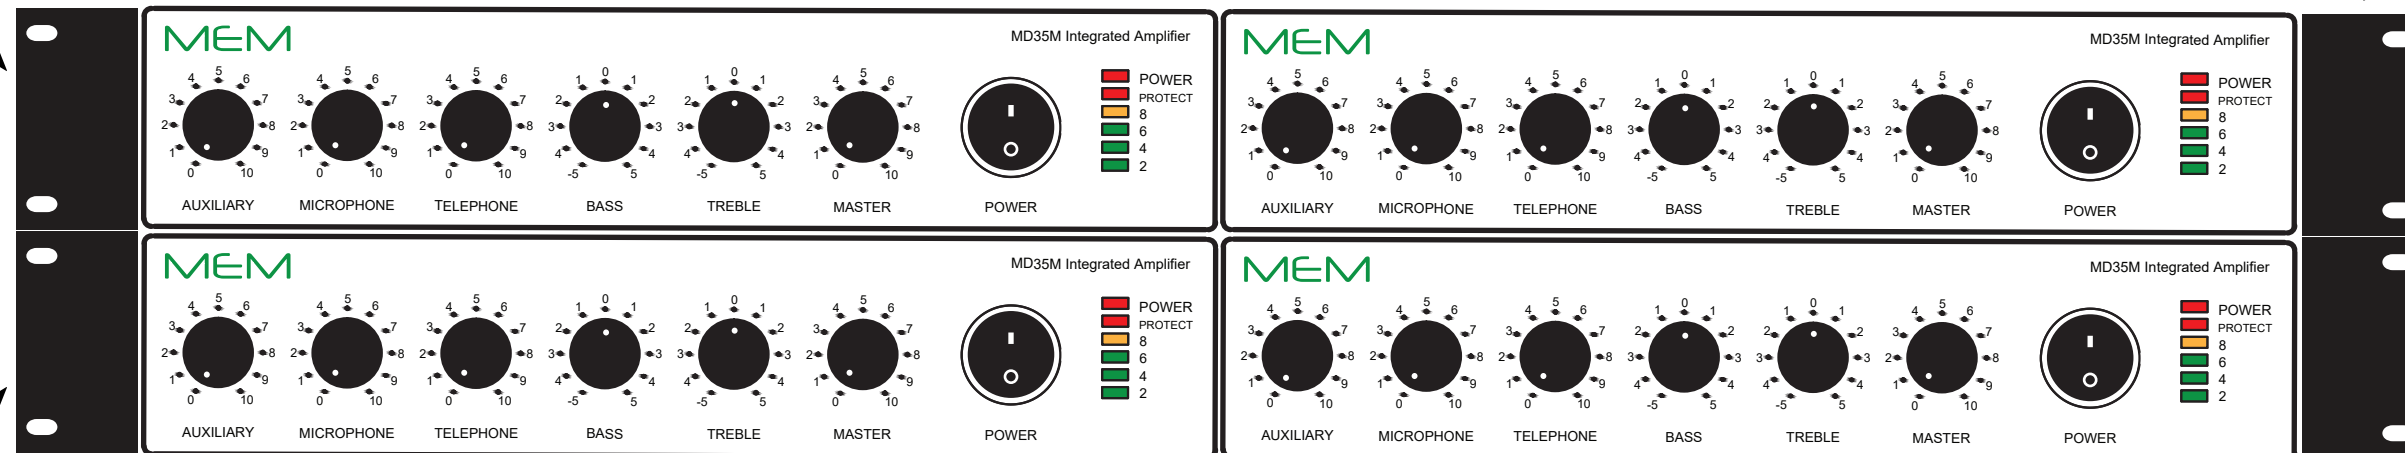

FRONT PANEL VIEW

MD60M
60 WATT

MD35M
35 WATT

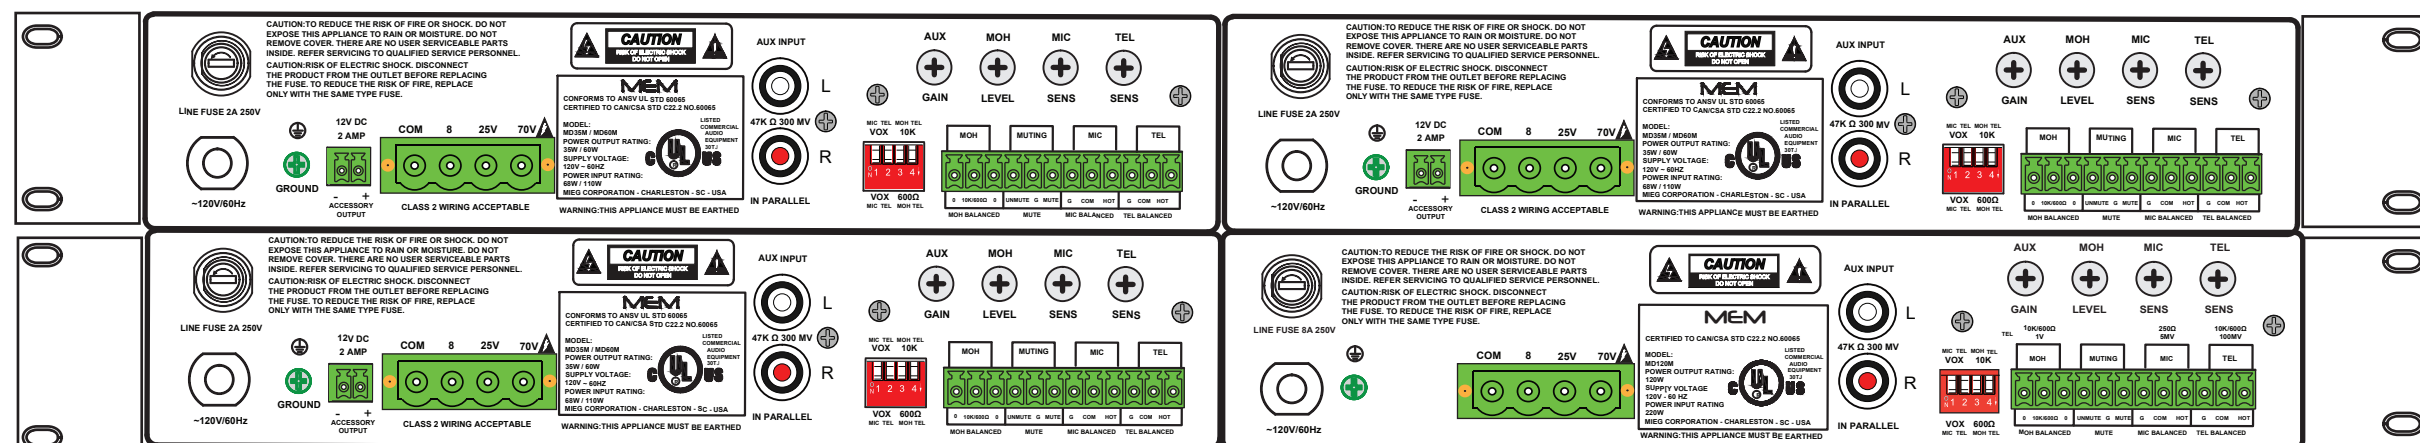


MD60M
60 WATT

MD120M
120 WATT

REAR PANEL VIEW

ASSEMBLY HALF RACK RACK MOUNTABLE

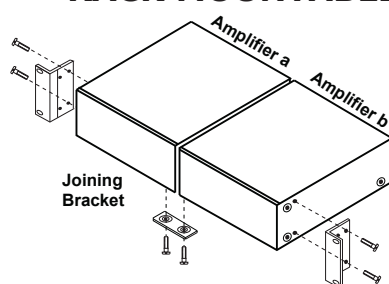

Model MRK2 Rack Kit
2 pcs required



FEATURES

- 4 - Microphone Inputs Balanced
- 4 - Telpage Inputs Balanced
- 4 - Auxiliary Inputs
- 4 - Independent 8 ohm 25/70V Output
- Individual Master Volume Control
- 3 - Individual 12 Volt DC 2A Supply Output
- Individual Music on Hold Output
- DIP Switch Programmable
- Phoenix Connectors

ECO-Friendly
Green Product



4 CHANNEL SYSTEMS CONFIGURATION

| Size | Document Description | REV |
|-------|-------------------------------------|--------------|
| SB | MEM - MDM SERIES DIGITAL AMPLIFIERS | 1.0 |
| Date: | DIM. MM | Sheet 1 of 1 |

© copyright MIEG CORP 2018

MIEG TECH SUPPORT: 1 843 819 8883